
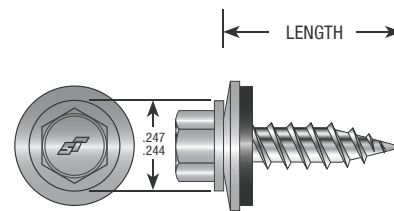


Kwikseal II WoodBinder®

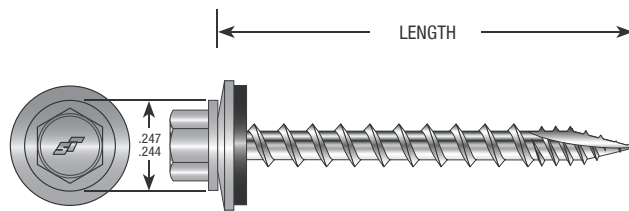

SPECIFICATIONS SUMMARY

Kwikseal II® Dimensions:

Drill Point: 30° Type 17
Major Diameter: .210/.200
Minor Diameter: .130/.126
Head Across Flats: .247/.244

SIZE	HEAD STYLE	CARTON QTY.	WEIGHT/M
10 x 1"	1/4" HWH	3000	8.0
10 x 1-1/2"	1/4" HWH	2500	10.1
10 x 2"	1/4" HWH	2000	12.2
10 x 2-1/2"	1/4" HWH	1500	15.4
10 x 3"	1/4" HWH	1000	17.2
12 x 3/4" STITCH	1/4" HWH	2500	8.8
12-14 x 3/4"	5/16" HWH	2500	12.7

PERFORMANCE DATA

PULL OUT STRENGTH VALUE (LBS. ULT.)	SUBSTRATE							
	3/4 PLY	5/8 PLY	1/2 PLY	7/16 OSB	2X Y. PINE		2X SPF	
					1" PENET.	FULL PENET.	1" PENET.	FULL PENET.
	707	590	400	310	1552	1552	492	1042
							1894	


PULL OVER STRENGTH VALUE (LBS. ULT.)	DESIGNATION	MATERIAL		
		AZ55 GALVALUME		
	NOM. GAUGE	29	26	24
	THICKNESS	.015	.019	.024
BONDED WASHER (.472" Dia) (12mm)		378	629	721

POWDER COATED

ZXL available with Powder Coating End of 2012.




The combination of the Type 17 point & transition thread from fine to coarse generates superior drill speed in metal & holding strength in wood substrates.



ST Magnetic Sockets are available for powder coated fasteners.



Hex Washer Head with EPDM rubber washer provides a watertight seal on roof applications. Sealite sockets are designed to allow for the added thickness of the powder coat.

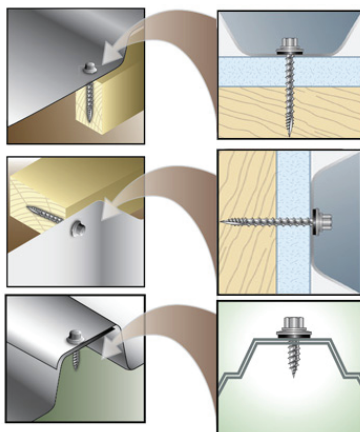

- Fastener designed to attach steel roofing & siding used in post-frame & residential metal roofing applications.
- Threads transition from fine to coarse to generate superior holding strength in various wood substrates.
- Sharp Point & pronounced lead thread consistently drills high tensile 29 & 26 gauge steel with no "point walking."
- Type 17 point reduces metal shavings that can embed themselves in the rubber washer.
- EPDM rubber is vulcanized to a steel washer to form an excellent seal even when driven at an angle.

NOTES: All strength values shown below are ultimate values, expressed in LBS. Apply an appropriate safety factor to obtain design limits.

ST
SEALTITE
BUILDING FASTENERS
www.sealtite.com

6357 Reynolds Road
P.O. Box 4515, Tyler, Texas 75712
800-352-4864 • 800-352-3940 Fax
903-592-2826 • 903-592-1583 Fax

9950 Princeton Glendale Rd.
Cincinnati, OH 45246
800-944-8920 • 800-944-4183 Fax
513-874-5905 • 513-874-5903 Fax