

August 16, 2013

Sol Attach, LLC
Attn: Kevin Stapleton
16238 Bear Run
San Antonio, TX 78247



Re: Solar Mounting System for Pitched Rooftops with Sol Attach Roof Mounting System in **Missouri**

To Whom It May Concern:

Anchor Engineering, Inc. has reviewed the Sol Attach Roof Mounting System for the design assumptions outlined below and we have concluded that the Sol Attach Roof Mounting System is in compliance with the following codes/standards.

1. ASCE 7-05 – Minimum Design Loads for Buildings and Other Structures, by ASCE/SEI, 2005.
2. ASCE 7-10 – Minimum Design Loads for Buildings and Other Structures, by ASCE/SEI, 2010.
3. 2006 IBC/ 2009 IBC/ 2012 IBC, by International Code Council, 2006/2009/2012.
4. 2006 IRC/ 2009 IRC/ 2012 IRC, by International Code Council, 2006/2009/2012.

Design Assumptions:

- Maximum mean roof height of no more than 30'-0" as defined by ASCE 7-05/ASCE 7-10.
- Importance Factor of no more than 1.0 as defined by ASCE 7-05/ASCE 7-10.
- Dry service conditions.
- Array may be located within roof zones 1, 2, or 3.
- Analysis of the mount is based upon the maximum effects of either the largest gravity loads or wind uplift loads. The point loads (either positive or negative) can act in either direction depending upon the type of loading (i.e. wind, snow...etc.).
- Fasteners installed per manufacturer specifications.
- When using the Sol Attach, four PV mounts per PV module such that adjacent modules share two PV mounts.
- Use two Sol Attach per side unless noted otherwise (See charts below).
- At end clamp locations the Sol Attach Mount is only activated by one half of the panel.
- Snow load = 30 psf.

Product Specifications:

- Aluminum alloy is 6061-T6.
- Kwikseal II Woodbinder Screws. The screws must penetrate the sheathing fully and have a minimum of three threads exposed.
- (3) screws per Sol Attach Mount at end clamp locations.

Roof Pitch: 7-27°			
Wind Speed, (V_{ult})	Wind Speed, (V_{asd})	Exposure	Fastener Req'd per Sol Attach w/ 7/16" OSB
129 mph ≥ x	100 mph ≥ x	C	(4) Screws

Roof Pitch: 27-45°			
Wind Speed, (V_{ult})	Wind Speed, (V_{asd})	Exposure	Fastener Req'd per Sol Attach w/ 7/16" OSB
129 mph ≥ x	100 mph ≥ x	C	(4) Screws

Module Specifications:

- Modules may be installed in landscape or portrait orientation.
- Modules may have a maximum short side dimension of 39.1".
- Modules may have a maximum long side dimension of 77.1".
- Modules may be a maximum of 59.5lb.


Please see attached data sheets for the Sol Attach Roof Mounting System specification sheet.

The Sol Attach Roof Mounting System was evaluated for pull-out resistance of the fasteners and punching shear in the OSB. Review of any building structural element is outside the scope of this letter.

Should questions arise, or if further information is required, please contact our office.

Sincerely,
Anchor Engineering, Inc.

Reviewed by:

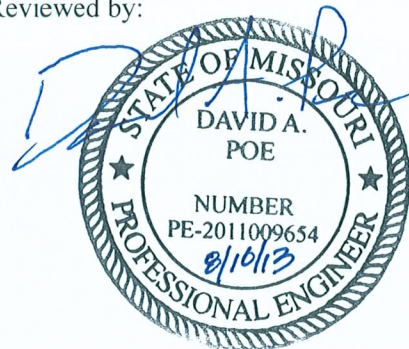

Dustin C. Stallings, E.I.
Design Engineer I

David A. Poe, P.E., S.E.
Principal Engineer